


Specification:

- 1.LC/UPC Connector 3.0mm
- 2.LC/UPC Connector 3.0mm
- 3.2F 3.0x6.1mm DX OM4 Indoor Cable LSZH
- 4.Length:XX M
- 5.Heat Shrink

Performance:

- 1.Insertion loss:Typical≤0,10dB,Max≤0,20dB
- 2.Return loss:SM,UPC≥50dB,APC≥60dB
MM,UPC≥30dB
- 3.Durability:<0,2dB,Typical Change:1000 Matings
- 4.Insert-pull Test:500times<0,5dB
- 5.Operating Temperature:-20°C to +70°C

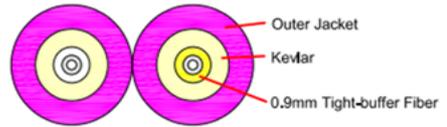

Length Tolerance

Tolerance	L≤0,5M	0,5M<L≤5M	5M<L≤10M	10M<L≤30M	30M<L≤100M	L>100M
MM	+50/-0	+100/-0	+150/-0	+250/-0	+1%/L-0	+1,5%/L-0

3.Cable Parameter

NO.	Items	Detail	Description
1	Tight Buffer Fiber	Fiber Count	2F
		Diameter	0,85±0,05 mm
2	Strength member	Material	Kevlar
3	Outer Jacket	Diameter	3,0x6,1(±0,2) mm
		Material	LSZH
		Color	Magenta

ANGLE ±1°		UNITS: MM	VERSION: 1,0	LCU-LCU DX MM Patchcord
SURFACE TEXTURE		SCALE:	DATE: 2026/03/11	
TOLERANCES ARE:		PAGE: 1/1	DRAWING BY:	
X		MATERIAL	CHECK BY:	
X,X			APPROVE BY:	
X,XX				

REV	DESCRIPTION	DATE